


R&M SPACEMASTER EX

DOUBLE GIRDER, 6 PART DOUBLE
SX6 EX 062...D0

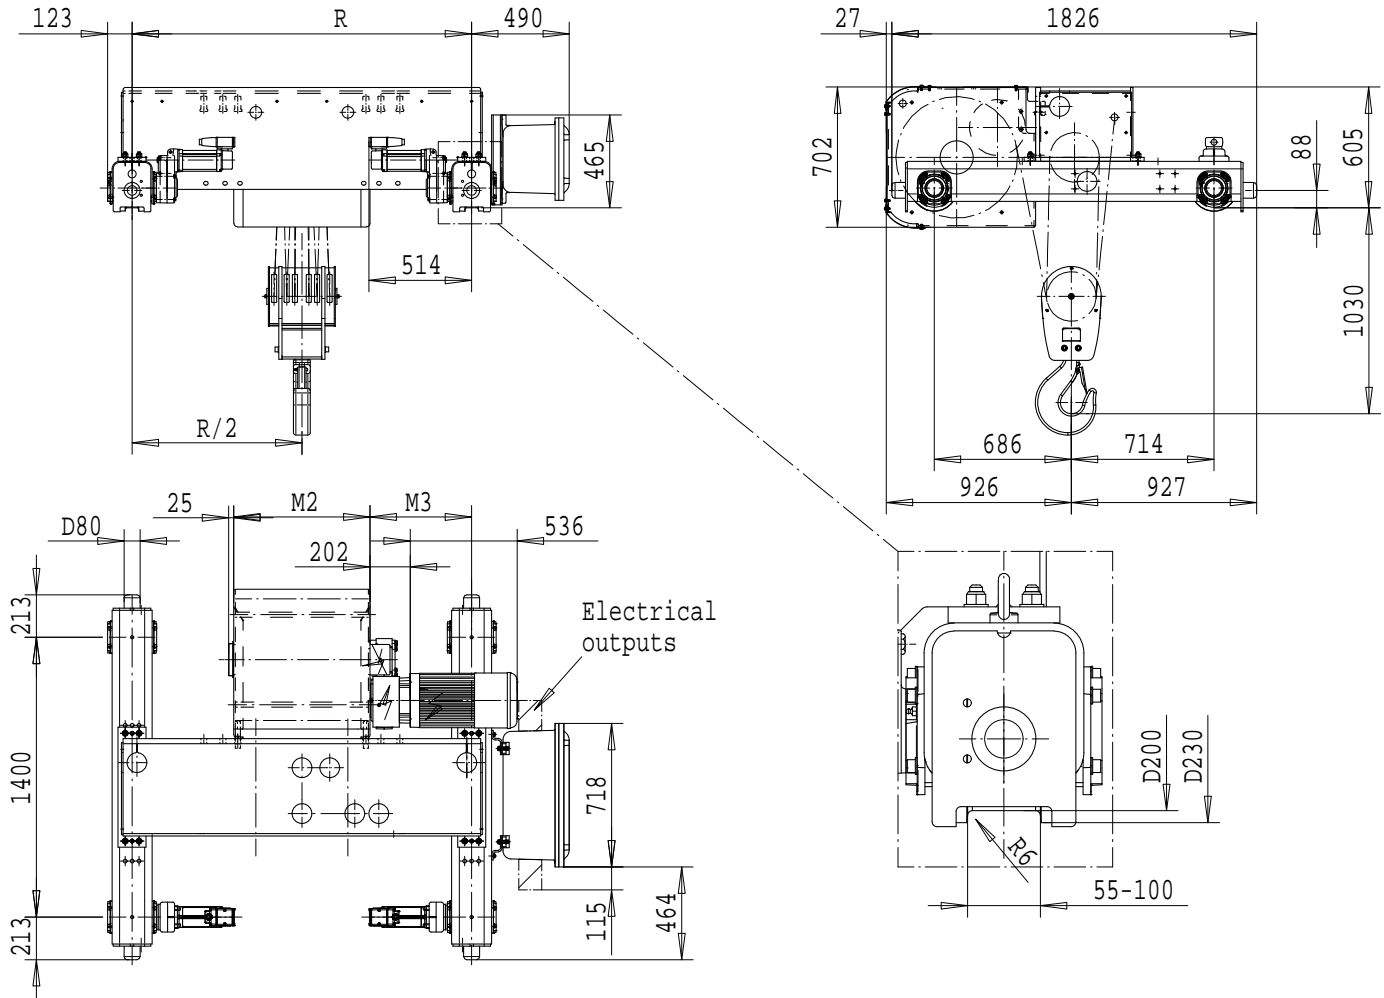

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)	
		3m/M6	3/0.5
20000	3m/M6	3/0.5	3.8/0.6

SI-60Hz

HOL (m)	Length code	M2 (mm)	M3 (mm)	min R-max R (mm)	Weight (kg)
5.5	E	682	359	1400-2400	1780
7	F	832	434	1700-2400	1850
9.5	G	1022	339	1700-2700	1950
13	H	1272	364	2000-3100	2050
17	J	1622	389	2400-3400	2180
21	K	1922	389	2700-4200	2280
25.5	L	2272	414	3100-4200	2430
28.5	M	2522	439	3400-4200	2530
32.5	N	2822	489	3800-4200	2680

min R is minimum rail gauge when service platform is supplied. Weight calculated at minR. Weight increases with longer gauges. Standard rail gauges are 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800, and 4200

R&M reserves the right to alter or amend the above information without notice