


The document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents hereof must not be disclosed to a third party nor be used for any unauthorized purposes. Corrections will be provided.

# RSN14 END TRUCK SIDE JOINT PLATE TYPE EBN14-400

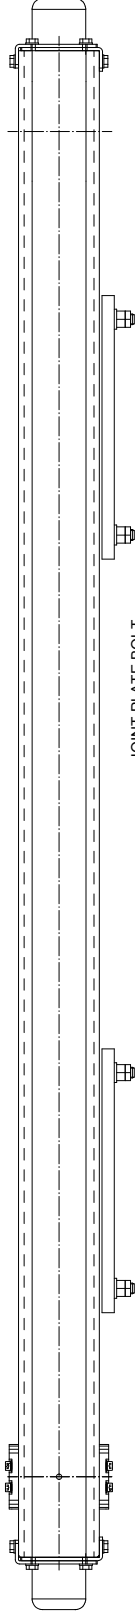

**JOINT PLATE BOLT  
TIGHTENING TORQUE**  
M16 Bolt - Torque to 221 ft-lb  
M20 Bolt - Torque to 427 ft-lb

SS

Product Code example  
**RSN14-2574-400255C1000-N**

- N=standard, E=Special primer paint, color code
- Joint plate distance (pin to pin with double DG girders; driving wheel to pin with asymmetrical single SG girder)
- Buffer type
- Joint plate height (JPH)
- Joint plate length (pin to pin) (JPL)
- 1WD, D ≈2WD (Number of driving wheels/ends carriage)
- Wheel groove =UU
- Wheel base =SS (type)
- std, C =asymmetrical joint
- Type of end carriage

The wheel loads listed are only a guideline. The max. wheel load listed is based on the structural integrity of the frame and load placement, and it does not take into account permissible wheel loading or bearing life. SG load placement is at the center, and DG load placement is for a trolley gauge of 1400 mm (55 1/8").

The permissible dynamic wheel load listed is based on assumptions that the bridge speed is 40 m/min (130 fpm), end truck duty is Fem 2m, and the runway rail as listed.

The actual wheel load should not exceed the permissible wheel load. If the permissible dynamic wheel load is greater than the maximum dyn wheel load, then the actual wheel load cannot exceed maximum dyn wheel load.

Dyn wheel load = 1.15 x Static wheel load

UU = 2 1/8" - 3 5/16"

Buffer type	L1	Ø
A	2.09"	2 1/2"
B	2 11/16"	3 3/16"
C	3 5/16"	3 15/16"
D	4 1/8"	4 15/16"
K	3 3/16"	3 3/16"
G	3 15/16"	3 15/16"
E	5 15/16"	3 15/16"
M	4 15/16"	4 15/16"
F	7 1/2"	4 15/16"
H	6 15/16"+3 15/16"	6 5/16"
P	9 7/16"+3 15/16"	6 5/16"
K, G, E, M, F, H, P polyurethane		

Wheelbase code	Max dyn whl load, (kip)	Perm dyn whl load, (kip)			Approx. Wgt / Trk (lb)			
		ASCE 30	ASCE 40	ASCE 60	SG	DG		
16	5'-3"	10.575	12.375	8.46	9.675	13.05	364	463
20	6'-6 3/4"	10.575	12.375	8.46	9.675	13.05	414	470
25	8'-2 7/16"	10.575	12.375	8.46	9.675	13.05	476	531
32	10'-4"	10.575	12.375	8.46	9.675	13.05	558	613
35	11'-5 13/16"	9	12.375	8.46	9.675	13.05	602	657
40	13'-1 1/2"	7.2	8.325	8.46	9.675	13.05	668	723

Part No.	2008-11P-14	REV	1
Description	END TRUCK	DATE	03/2011
Quantity	1	Drawn by	
Spec Location	END TRUCK	Check Drawing	
Part No.	RSN16-EBN	Part No.	EBN14
Part Name	OUTLINE DRAWING	Part Name	EBN14
Part No.	RSN16-EBN	Part No.	EBN14
Part Name	OUTLINE DRAWING	Part Name	EBN14
Part No.	RSN16-EBN	Part No.	EBN14
Part Name	OUTLINE DRAWING	Part Name	EBN14

## RSN14 END TRUCK

RSN14 END TRUCK  
WHEEL ASSEMBLY  
SPRINGS