DOUBLE GIRDER, MEDIUM, 4 PART SINGLE

Hoist type:

SX4 041...D0

SI-50Hz

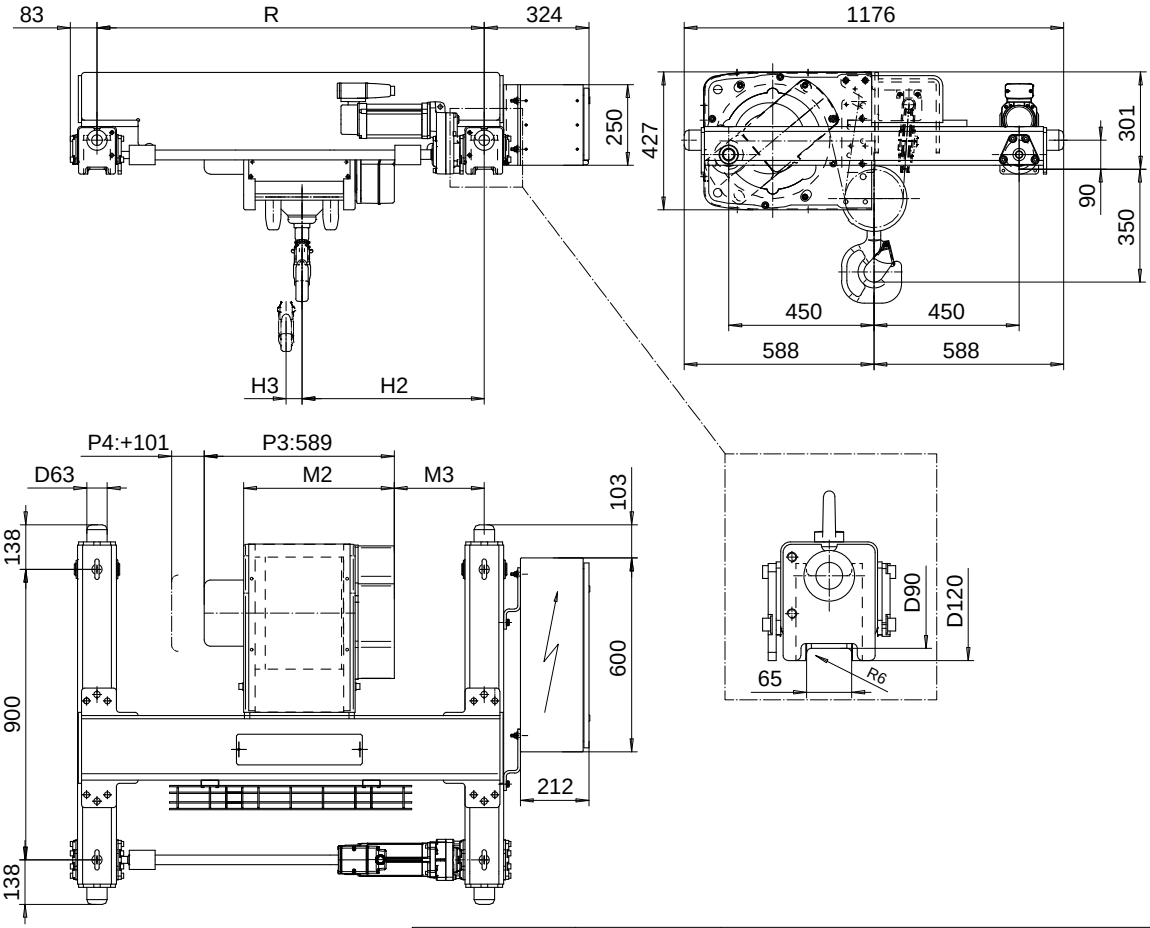

Load	Class	Hoisting speed (m/min)		
(kg)	Fem/ISO	Gear+Motor code:		
		E+P3	F+P3	H+P4
3200	3m/M6	4/0.7	5/0.8	8/1.3
4000	3m/M6	4/0.7	5/0.8	8/1.3
5000	2m/M5	4/0.7	5/0.8	8/1.3
+ weight (kg):		-	-	20

HOL	Length	M2	M3	H2	H3	min R	Weight
(m)	code	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
6	B	467	280	565	49	1200	315
9	C	567	280	565	74	1200	325
12	D	667	352	637	99	1400	340
15	E	787	352	637	129	1400	360

Note: minR is minimum rail gauge when second brake is supplied
Standard rail gauges are 1200, 1400, 1700, and 2000 mm

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	QB-M-04
Date	TROLLEY; DOUBLE GIRDER			1:10
SLEQENG1 Owner Dept	MEDIUM, 4 ROPE FALLS			Folder
R&M MATERIALS HANDLING INC.	R&M MATERIALS HANDLING, INC. HOIST & CRANE PRODUCTS SPRINGFIELD, OHIO	D002095-A		Issue 4