


DOUBLE GIRDER, MEDIUM, 2 PART DOUBLE
Hoist type:
SX7 022...D0

SI-50Hz

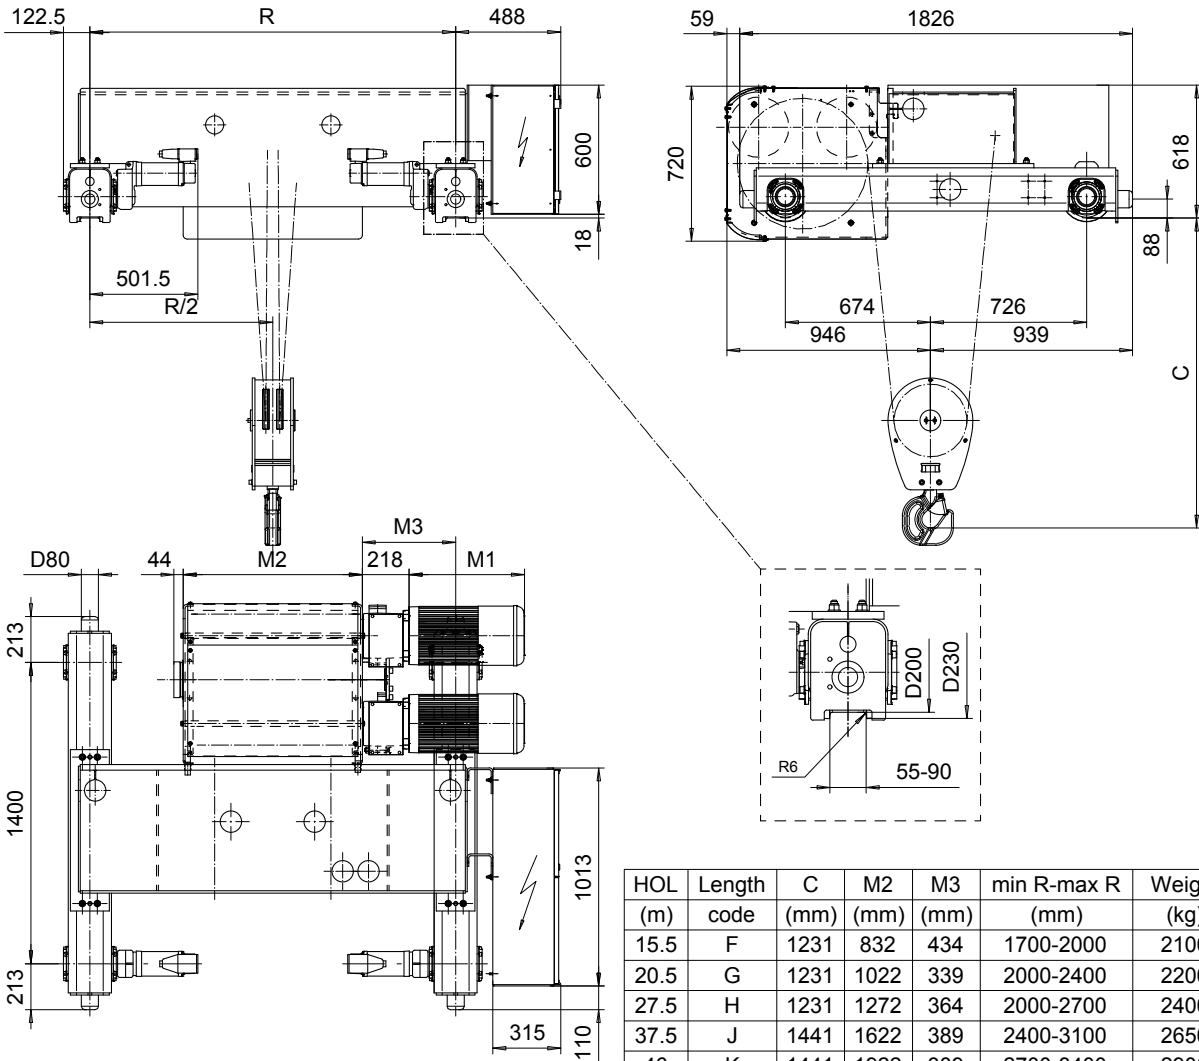

Motor	P6,T6,T7	P7
M1 (mm)	536	576

HOL (m)	Length code	C (mm)	M2 (mm)	M3 (mm)	min R-max R (mm)	Weight (kg)
15.5	F	1231	832	434	1700-2000	2100
20.5	G	1231	1022	339	2000-2400	2200
27.5	H	1231	1272	364	2000-2700	2400
37.5	J	1441	1622	389	2400-3100	2650
46	K	1441	1922	389	2700-3400	2900
55.5	L	1551	2272	414	3100-3800	3200
62.5	M	1551	2522	439	3400-4200	3450
71	N	1551	2822	489	3800-4200	3750

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		8/1,2: E	10/1,6: F	12,5/2: G	16: H	20: J
12500	3m/M6	P6,T6	P6,T6	P7,T7	T8	T9
16000	2m/M5	P6,T6	P6,T6	P7,T7	T8	T9
20000	1Am/M4	P6,T6	P7,T7	T8	T9	-

Note: minR is minimum rail gauge when service platform is supplied
 Standard rail gauges are 1400, 1700, 2000, 2400, 2700, 3100, 3400
 3800, and 4200 mm
 M3 and weight are calculated at minR

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETFPAL Design	ETFPAL Chd	Appd	Ref Drawing	QE-M-22
2003-01-13 Date	TROLLEY; DOUBLE GIRDER			1 of 15 Folder
SLEQDCV Owner Dept	MEDIUM, 2X2 ROPE FALLS			
R&M MATERIALS HANDLING, INC. HOIST & CRANE PRODUCTS SHEWAN/UNION	D002332-A			Issue 7