


DOUBLE GIRDER, MEDIUM, 6 PART SINGLE
Hoist type:
SX6 061...D0

SI-60Hz

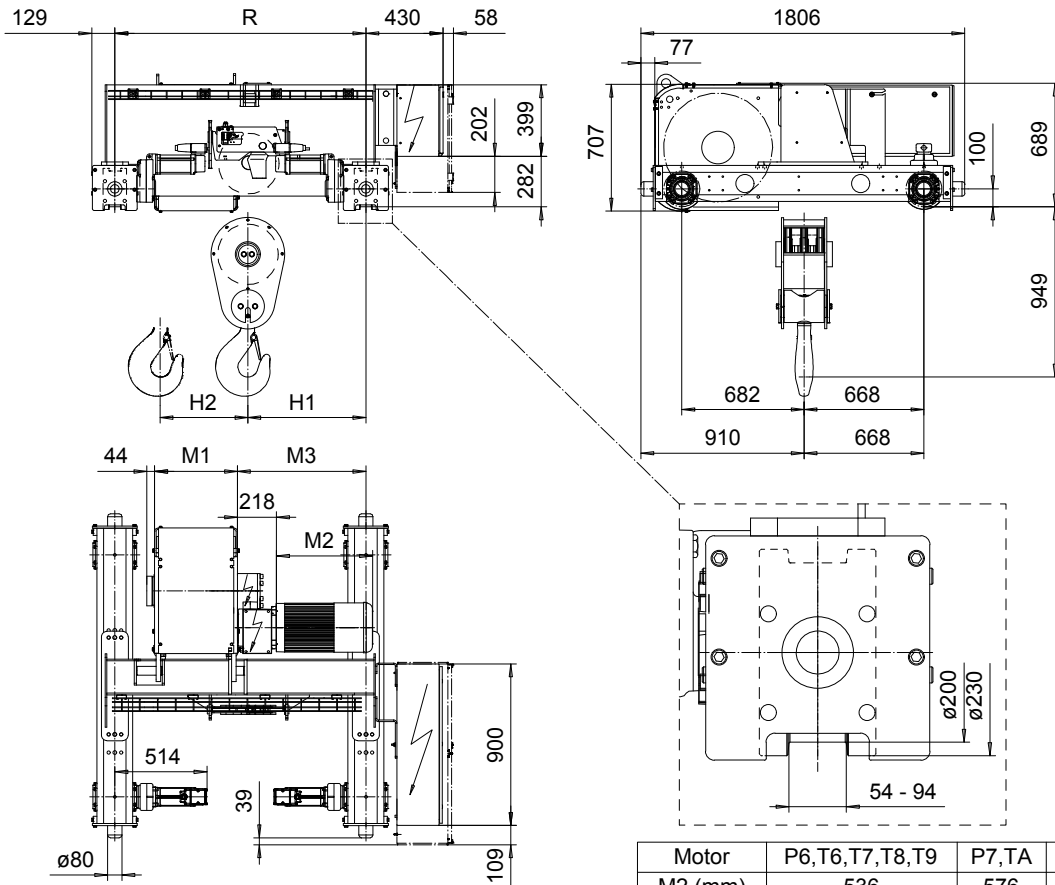

Motor	P6,T6,T7,T8,T9	P7,TA	P8
M2 (mm)	536	576	711
Weight (kg)	85	106	106

HOL (m)	Length code	M1 (mm)	M3 (mm)	H1 (mm)	H2 (mm)	min R-max R (mm)	Weight* (kg)
5	C	462	716	658	46	1400	1600
7	D	562	801	743	63	1700	1680
9	E	682	801	743	84	1700-2000	1730
12	F	832	951	893	107	2000-2700	1830
15.5	G	1022	1151	1093	140	2400-3100	1970
20	H	1272	1471	1413	182	3100-3800	2240
26.5	J	1622	1561	1503	240	3400-4200	2460
32	K	1922	1946	1888	289	4200	2840

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		3/0.5 : E	3.8/0.6: F	4.8/0.8:G	6: H	7.5: J
20000	3m/M6	P6,T6	P6,T6	P7,T7	T8	T9
25000	2m/M5	P6,T6	P6,T6	P7,T7	T8	T9
30000	1Am/M4	P6,T6	P7,T7	P8,T8	T9	TA

*Weight calculated with P6 motor.

Note: minR is minimum rail gauge when service platform is supplied
 Standard rail gauges are 1400, 1700, 2000, 2400, 2700, 3100, 3400
 3800, and 4200 mm
 H2, M3 and weight are calculated at minR

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETFPAL Design 2002-09-02 Date	ETFPAL Chd SLEQDCV Owner Dept	Appd	Ref Drawing	QD-M-06
TROLLEY; DOUBLE GIRDER			1 of 18	
MEDIUM, 6 ROPE FALLS			Folder	
R&M R&M MATERIALS HANDLING, INC. HOIST & CRANE PRODUCTS			Issue 10/2010	
D006649-A				