


FOOT MOUNT, 6 PART DOUBLE
Hoist type:
SX5 062...F0

SI-50Hz



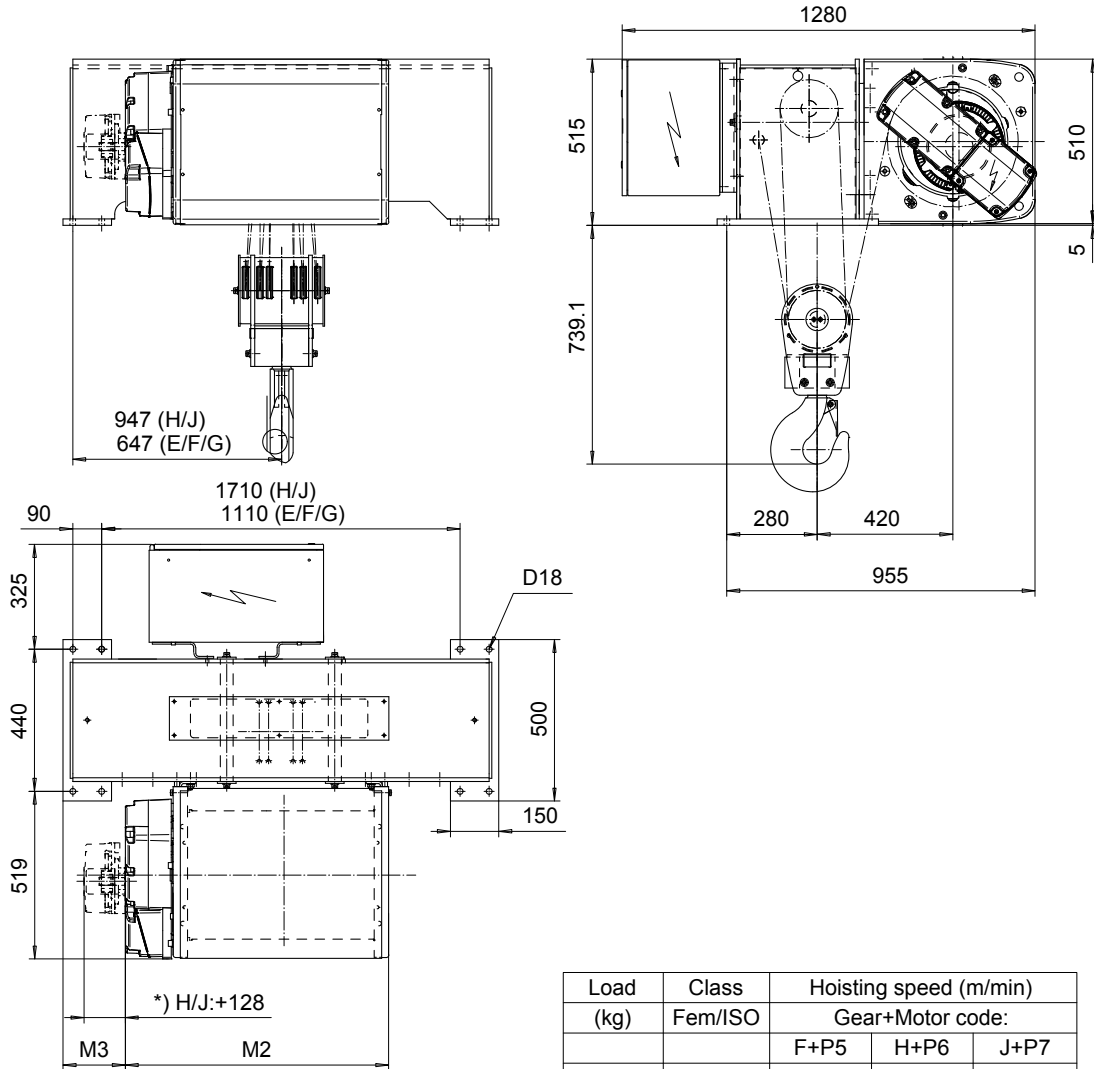

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
12000	3m/M6	3.2/0.5	5/0.8	6.3/1.1
15000	2m/M5	3.2/0.5	5/0.8	6.3/1.1
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	Weight (kg)
4	E	816	193	520
6	F	966	118	530
8	G	1156	23	590
11	H	1406	198	705
15	J	1756	23	1000

Primary brake is mounted on gearcase for drum lengths H and J.

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETFPAL Design	ETFPAL Chd	Appd	Ref Drawing	QC-F-26
2002-08-30 Date	HOIST; FIXED			 1:10 Folded
SLEQDCV Owner Dept	2X6 ROPE FALLS			
 R&M R&M MATERIALS HANDLING, INC. HOIST & CRANE PRODUCTS 10000 W. 100th St. Overland Park, KS 66214		D002131-A		Issue 4