


# FOOT MOUNT, 6 PART DOUBLE

Hoist type:  
SX6 062...F0


SI-50Hz

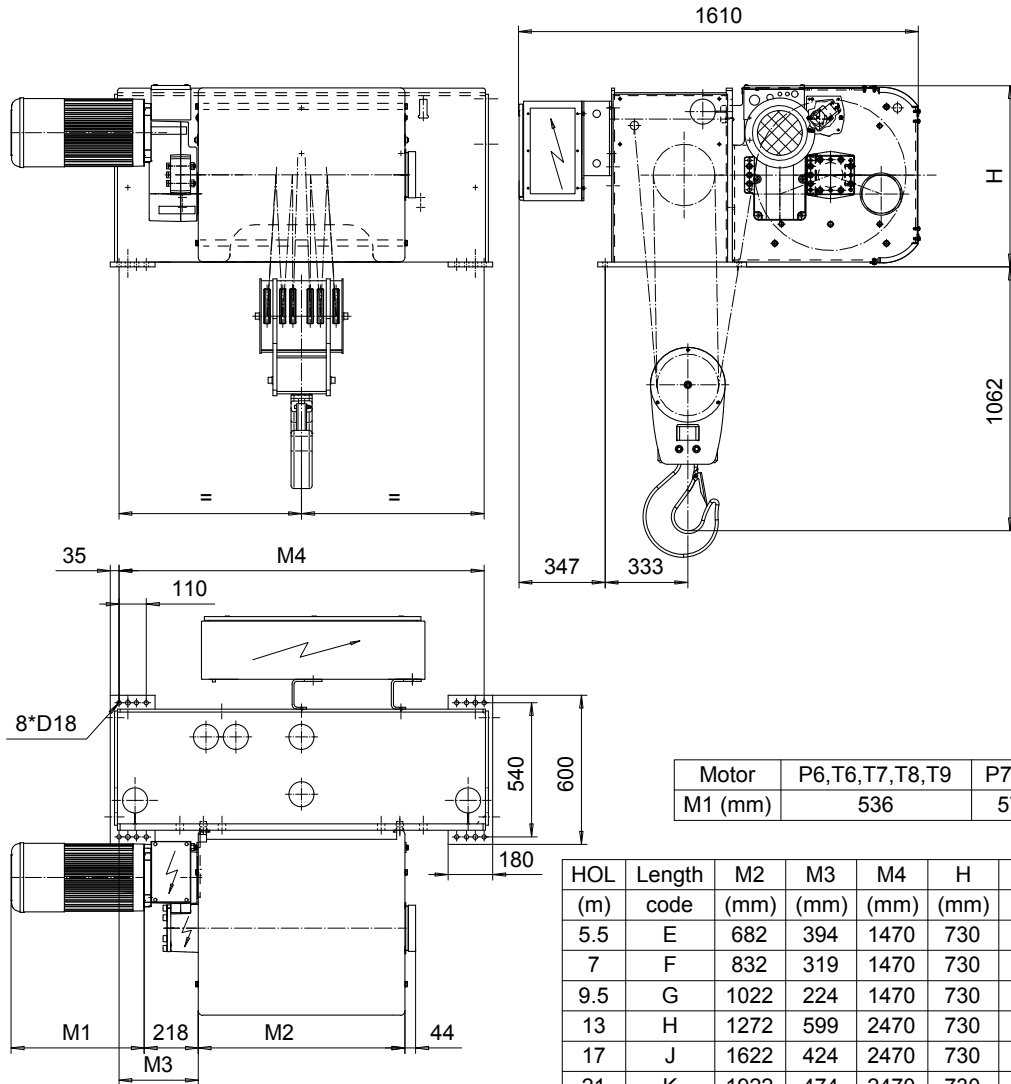

Motor	P6,T6,T7,T8,T9	P7,TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	H (mm)	Weight (kg)
5.5	E	682	394	1470	730	1500
7	F	832	319	1470	730	1550
9.5	G	1022	224	1470	730	1600
13	H	1272	599	2470	730	1925
17	J	1622	424	2470	730	2025
21	K	1922	474	2470	730	2125
25.5	L	2272	449	3170	830	2575
28.5	M	2522	324	3170	830	2675
32.5	N	2822	174	3170	830	2775

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		2.5/0.4: E	3.2/0.5: F	4/0.7: G	5: H	6.3: J
20000	3m/M6	P6,T6	P6,T6	P7,T7	T8	T9
25000	2m/M5	P6,T6	P6,T6	P7,T7	T8	T9
30000	1Am/M4	P6,T6	P7,T7	P8,T8	T9	TA

ETTPAL Design	ETTPAL Chd	Appd	Ref Drawing	QD-F-26
2002-09-03	HOIST; FIXED			 1:1 Follows
SLEQDOCV	2x6 ROPE FALLS			
R&M	R&M MATERIALS HANDLING, INC.	D002157-A		6

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.