FOOT MOUNT, 4 PART DOUBLE

Hoist type:

SX5 042...F0

SI-60Hz

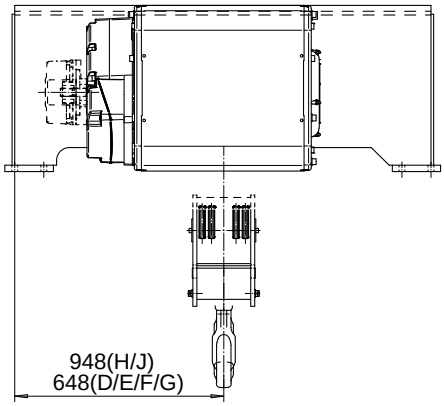

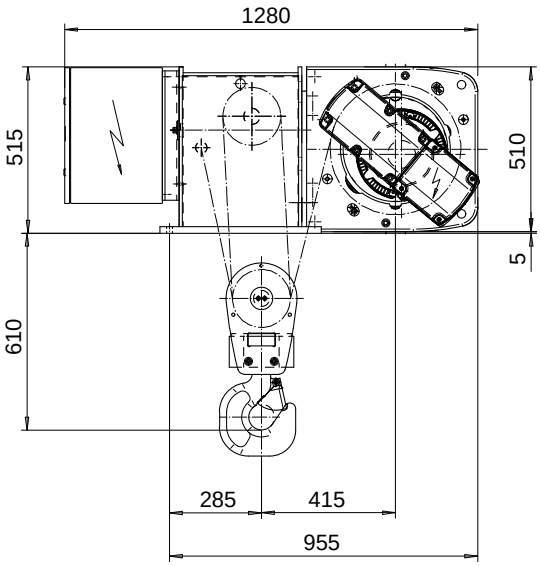

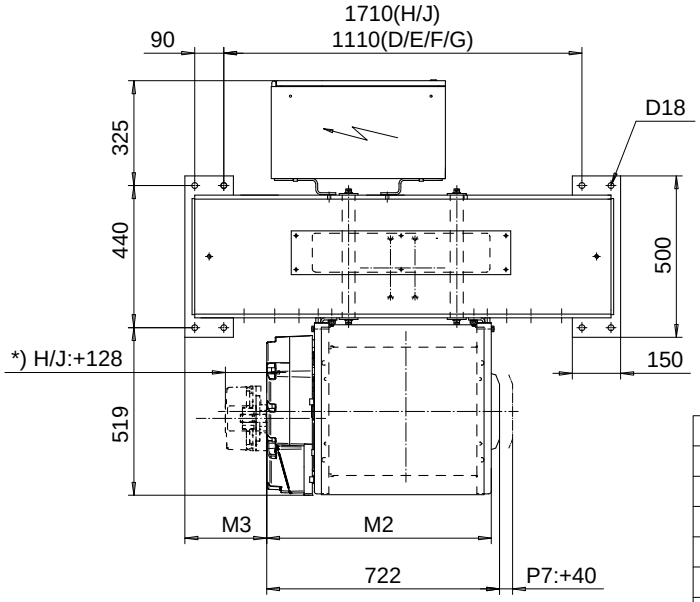

Load	Class	Hoisting speed (m/min)		
(kg)	Fem/ISO	Gear+Motor code:		
		F+P5	H+P6	J+P7
6000	3m/M6	6/1	9.5/1.6	12/2
8000	3m/M6	6/1	9.5/1.6	12/2
10000	2m/M5	6/1	9.5/1.6	12/2
+ weight (kg):		-	30	40

HOL	Length	M2	M3	Weight
(m)	code	(mm)	(mm)	(kg)
4	D	696	253	440
6.5	E	816	193	500
9	F	966	118	530
12.5	G	1156	23	570
16.5	H	1406	198	685
23	J	1756	23	1000

Primary brake is mounted on gearcase for drum lengths H and J.

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETTPAL Design	ETTPAL Chd	Appd	Ref Drawing	QC-F-24
2002-08-30 Date	HOIST; FIXED			1:10
SLEQDOCV Owner Dept	2x4 ROPE FALLS			Folder
R&M MATERIALS HANDLING INC.	R&M MATERIALS HANDLING, INC HOIST & CRANE PRODUCTS SPRINGFIELD, OHIO	D002130-A		Issue 4