


FOOT MOUNT, 6 PART DOUBLE

Hoist type:

SX6 062...F0

SI-60Hz

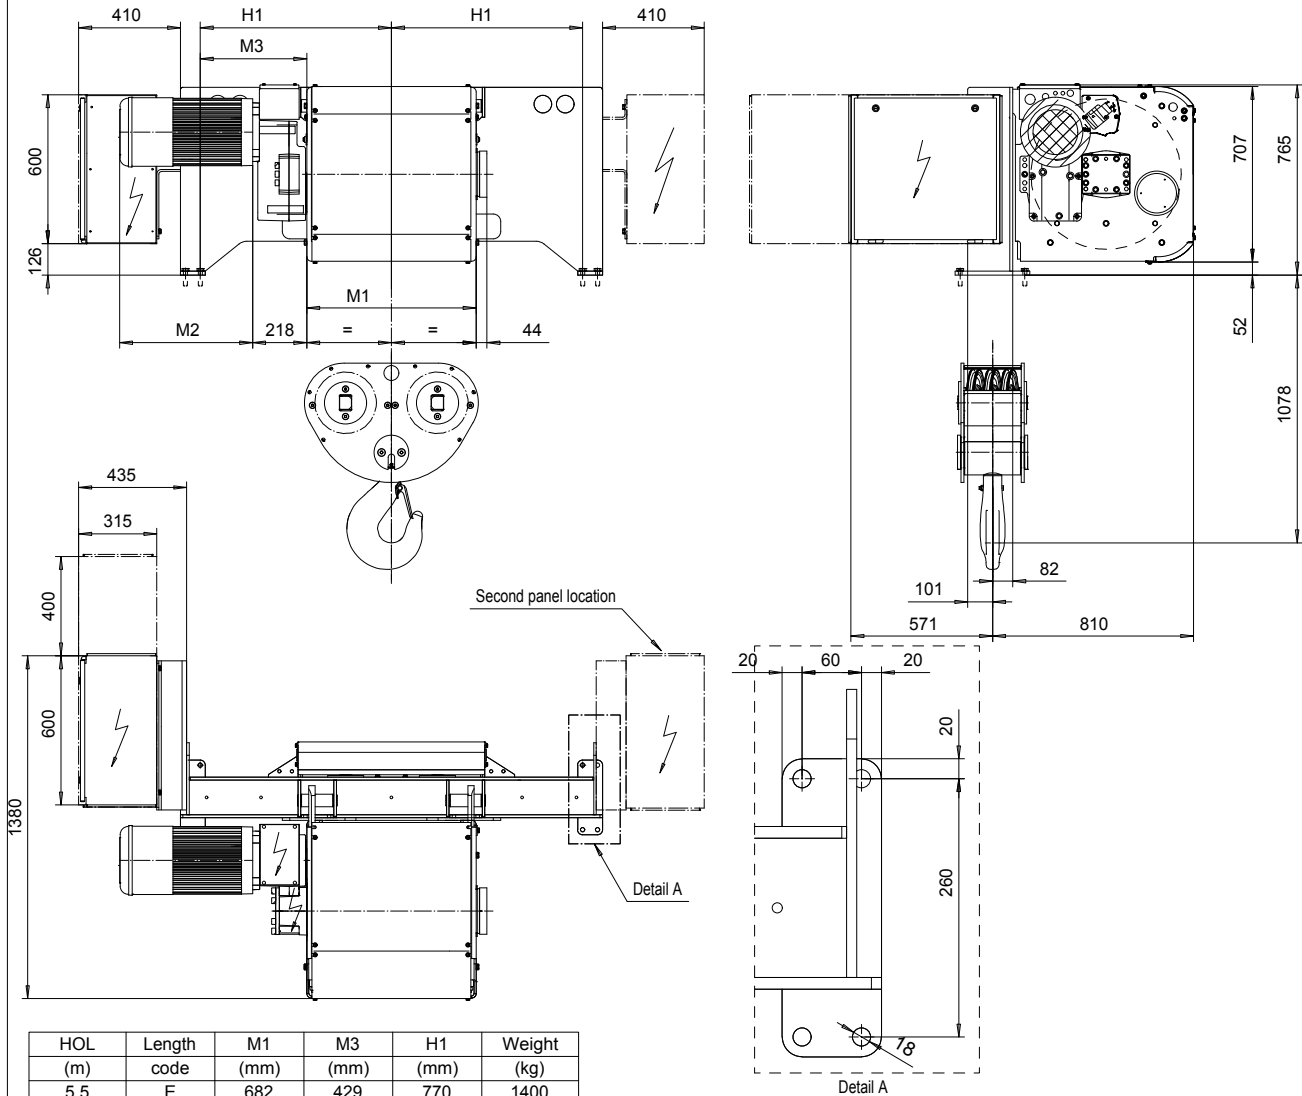

HOL	Length	M1	M3	H1	Weight
(m)	code	(mm)	(mm)	(mm)	(kg)
5.5	E	682	429	770	1400
7	F	832	354	770	1400
9.5	G	1022	259	770	1500
13	H	1272	434	1070	1700
17	J	1622	259	1070	1800
21	K	1922	134	1095	1900
25.5	L	2272	-40	1095	2100
28.5	M	2522	109	1370	2300
32.5	N	2822	-40	1370	2400

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		3/0.5: E	3.8/0.6: F	4.8/0.8: G	6: H	7.5: J
20000	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
25000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
30000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M2 (mm)	536	576	711
Wgt (kg)	81	106	106

Hoist weight calculated with P6 motor weight.

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETTPAL Design	ETTPAL Chd	Appd	Ref Drawing	QD-F-26
2002-09-03 Date	HOIST; FIXED			1:13
SLEQDQCV Drawn Dept	2x6 ROPE FALLS			Folder
R&M MATERIALS HANDLING INC.	R&M MATERIALS HANDLING INC. HOIST & CRANE PRODUCTS SPRINGFIELD, OHIO	D006942-A		Issue 1/2011