


FOOT MOUNT, 8 PART DOUBLE

Hoist type:

SX7 082...F0

SI-60Hz

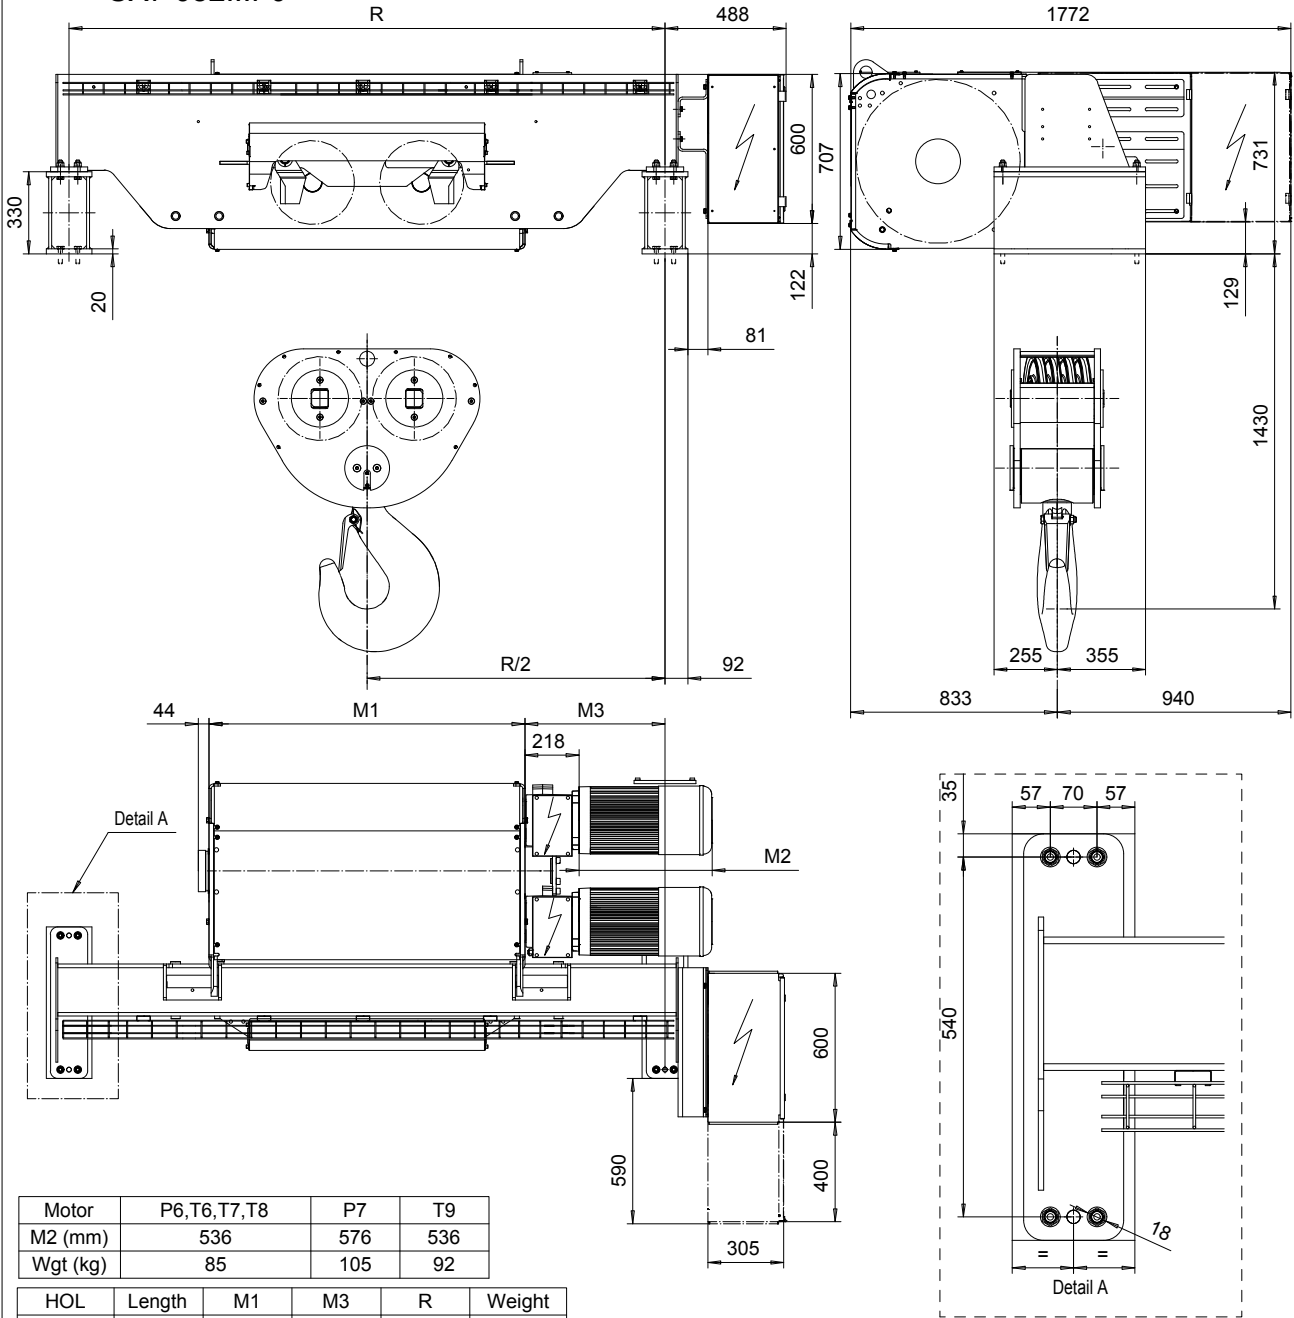

Motor	P6,T6,T7,T8	P7	T9
M2 (mm)	536	576	536
Wgt (kg)	85	105	92

HOL	Length	M1	M3	R	Weight
(m)	code	(mm)	(mm)	(mm)	(kg)
6.5	H	1272	565	2400	2000
9	J	1622	389	2400	2200
11	K	1922	339	3100	2600
13.5	L	2272	414	3100	2700
15.5	M	2522	840	3800	3100
17.5	N	2822	690	3800	3200

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		2.4/0.4: E	3/0.5: F	3.8/0.6: G	4.8: H	6: J
63000	2m/M5	P6,T6	P6,T6	P7,T7	T8	T9
80000	1Am/M4	P6,T6	P7,T7	T8	T9	-

Hoist weight calculated with P6 motor weight.

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETTPAL Design 2003-01-13 Date	ETTPAL Chd	Appd	Ref Drawing	QE-F-28
SLEODOCV Owner Dept	HOIST; FIXED 2X8 ROPE FALLS			1:13 Folder
R&M MATERIALS HANDLING INC.	R&M MATERIALS HANDLING INC. HOIST & CRANE PRODUCTS SPRINGFIELD, OHIO	D006947-A		Issue 1/2011