


FOOT MOUNT, 2 PART SINGLE
Hoist type:
SX6 021...F0

US-60Hz

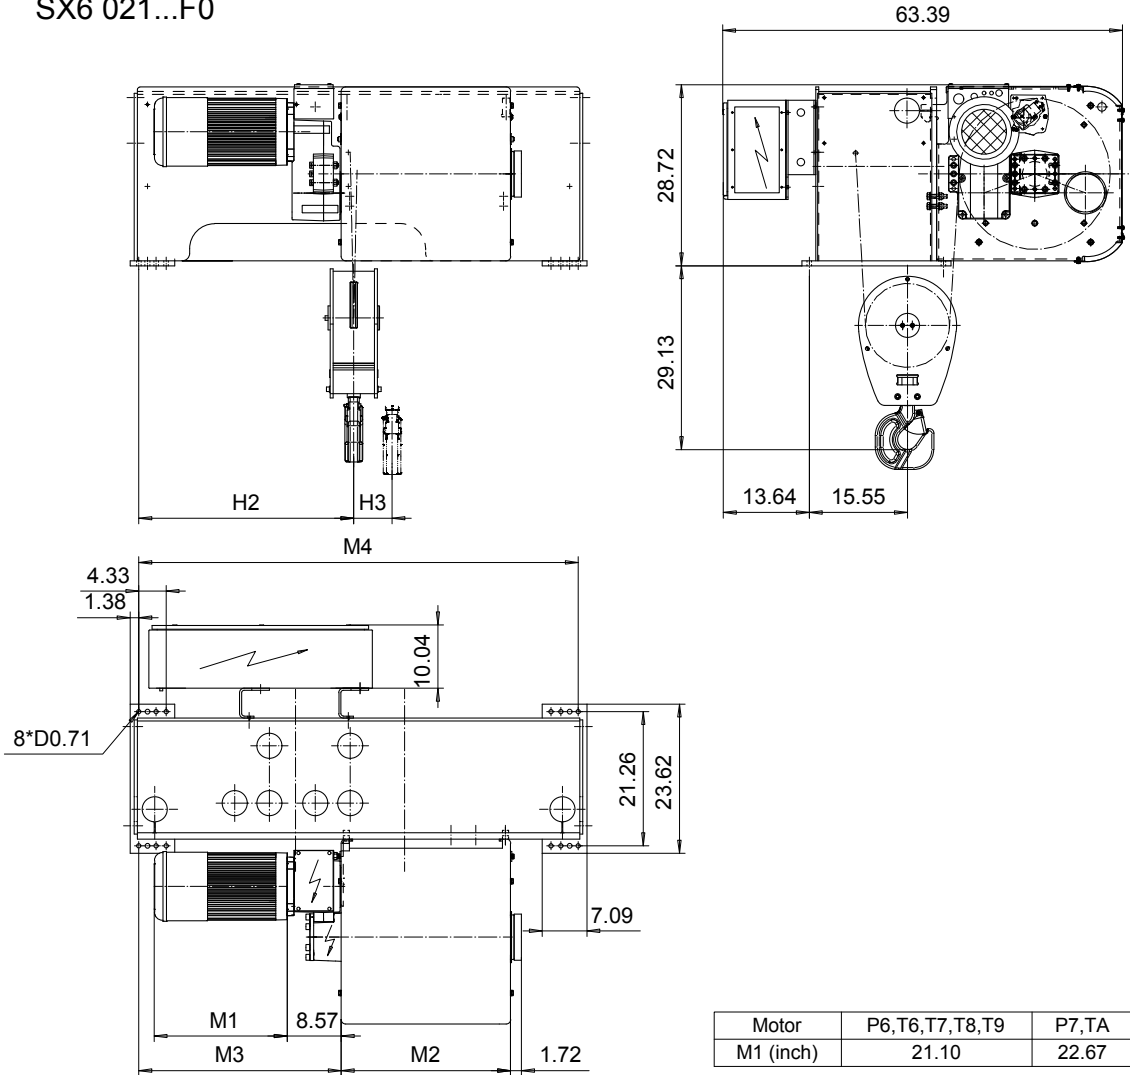

Motor	P6,T6,T7,T8,T9	P7,TA	P8
M1 (inch)	21.10	22.67	27.99

HOL (ft)	Length code	M2 (inch)	M3 (inch)	M4 (inch)	H2 (inch)	H3 (inch)	Weight (lb)
50'-10"	C	18.18	32.09	69.68	34.27	5.47	2600
68'-10"	D	22.12	32.09	69.68	34.27	7.40	2650
91'-10"	E	26.85	32.09	69.68	34.27	9.88	2750
118'-1"	F	32.75	18.70	69.68	21.00	12.67	2850
154'-2"	G	40.23	18.70	69.68	21.00	16.57	3050
200'-1"	H	50.07	18.46	101.57	20.76	21.49	3600
264'-1"	J	63.85	18.46	101.57	20.76	28.38	3800
318'-2"	K	75.66	18.46	101.57	20.76	34.17	4000

Load (TON)	Class ASME	Hoisting motor					
		Hoisting speed (ft/min): Gear code					
		30/4.9 : E	40/6.7 : F	50/7.8 : G	60 : H	80 : J	
6	H4+	P6,T6	P6,T6	P7,T7	T8	T9	
7 1/2	H4	P6,T6	P6,T6	P7,T7	T8	T9	
10	H3	P6,T6	P7,T7	P8,T8	T9	TA	

ETFPAL Design 2002-09-02 Date	ETFPAL Chd Appd	Ref Drawing	QD-F-02
SLEQDOCV Owner Dept	HOIST; FIXED 2 ROPE FALLS		1 of 15 Folder
R&M R&M MATERIALS HANDLING, INC. HOIST & CRANE PRODUCTS SHERBOURNE, ONT	D002141-A		Issue 6

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.