


**FOOT MOUNT, 6 PART SINGLE**

Hoist type:

SX6 061...F0

US-60Hz

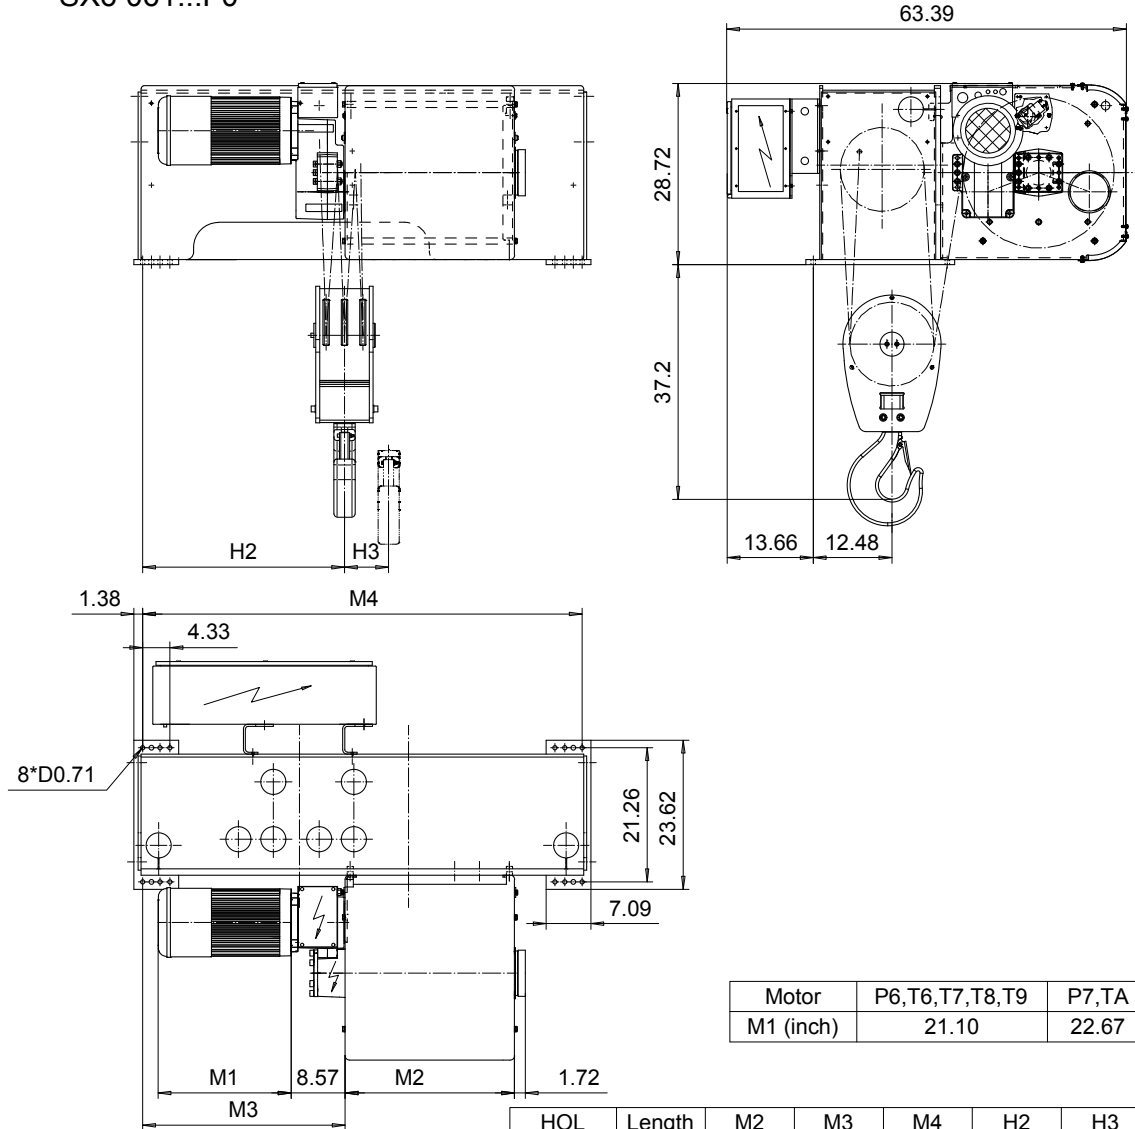

Motor	P6,T6,T7,T8,T9	P7,TA	P8
M1 (inch)	21.10	22.67	27.99

HOL (ft)	Length code	M2 (inch)	M3 (inch)	M4 (inch)	H2 (inch)	H3 (inch)	Weight (lb)
16'-4"	C	18.18	32.09	69.68	32.44	1.81	2900
22'-11"	D	22.12	32.09	69.68	32.44	2.48	2950
29'-6"	E	26.85	32.09	69.68	32.44	3.30	3050
39'-4"	F	32.75	18.70	69.68	19.17	4.21	3150
50'-10"	G	40.23	18.70	69.68	19.17	5.51	3350
65'-7"	H	50.07	18.46	101.57	18.94	7.16	3900
86'-11"	J	63.85	18.46	101.57	18.94	9.44	4100
105'-0"	K	75.66	18.46	101.57	18.94	11.37	4300

Load (TON)	Class ASME	Hoisting motor				
		Hoisting speed (ft/min): Gear code				
		10/1.5 : E	12.5/1.9 : F	16/2.4 : G	20 : H	25 : J
20	H4+	P6,T6	P6,T6	P7,T7	T8	T9
25	H4	P6,T6	P6,T6	P7,T7	T8	T9
30	H3	P6,T6	P7,T7	P8,T8	T9	TA

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETFPAL	ETFPAL	Appd	Ref Drawing	QD-F-06
Design	2002-09-02	Date	HOIST; FIXED	
SLEQDCV	Owner Dept	6 ROPE FALLS		1 of 15
R&M	R&M MATERIALS HANDLING, INC.	D002145-A		Issue 6