


FOOT MOUNT, 6 PART DOUBLE

Hoist type:

SX6 062...F0

US-60Hz

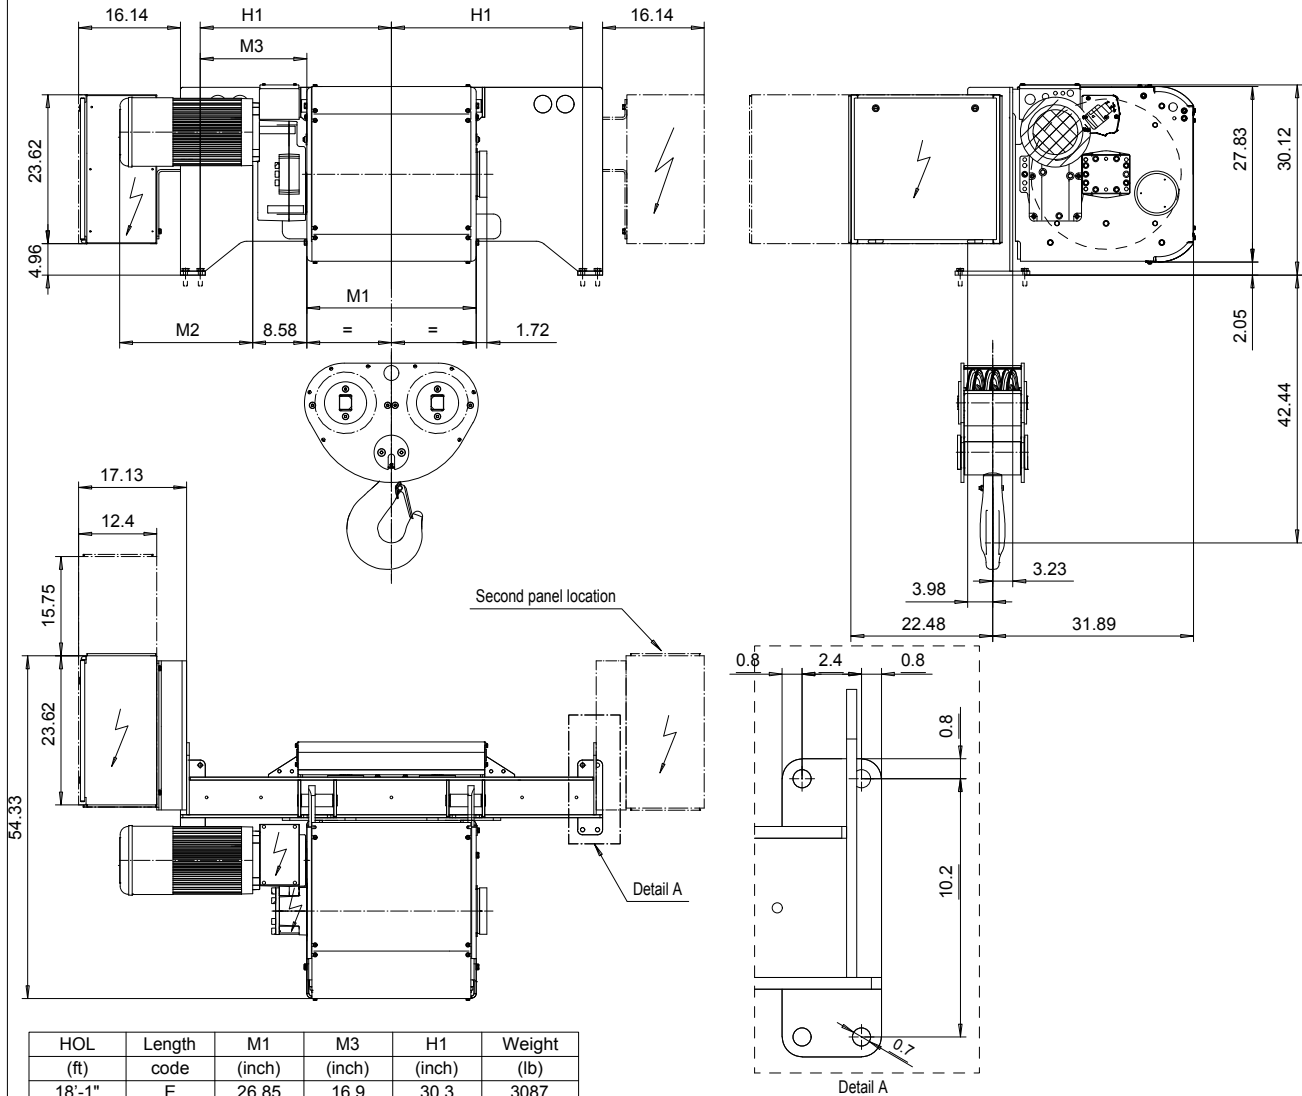

HOL	Length	M1	M3	H1	Weight
(ft)	code	(inch)	(inch)	(inch)	(lb)
18'-1"	E	26.85	16.9	30.3	3087
23'-0"	F	32.75	13.9	30.3	3087
31'-2"	G	40.23	10.2	30.3	3308
42'-8"	H	50.07	17.1	42.1	3749
55'-9"	J	63.85	10.2	42.1	3969
68'-11"	K	75.66	5.3	43.1	4190
83'-8"	L	89.44	-1.6	43.1	4631
93'-6"	M	99.29	4.3	53.9	5072
106'-8"	N	111.10	-1.6	53.9	5292

Load (TON)	Class ASME	Hoisting motor				
		Hoisting speed (ft/min): Gear code				
		10/1.5: E	12.5/1.9: F	16/2.4: G	20: H	25: J
20	H4+	P6,T6	P6,T6	P7,T7	T8	T9
25	H4	P6,T6	P6,T6	P7,T7	T8	T9
30	H3	P6,T6	P7,T7	P8,T8	T9	TA

Motor	P6,T6,T7,T8,T9	P7,TA	P8
M2 (inch)	21.10	22.67	27.99
Wgt (lb)	179	234	234

Hoist weight calculated with P6 motor weight.

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETTPAL Design	ETTPAL Chd	Appd	Ref Drawing	QD-F-26
2002-09-03 Date	HOIST; FIXED			1:13
SLEQDOCV Desain Dept	2x6 ROPE FALLS			Folder
R&M MATERIALS HANDLING INC.	R&M MATERIALS HANDLING INC. HOIST & CRANE PRODUCTS SPRINGFIELD, OHIO	D006942-A		Issue 1/2011