NORMAL HEADROOM, 2 PART DOUBLE

Hoist type:

SX5022...N0

SI-60Hz

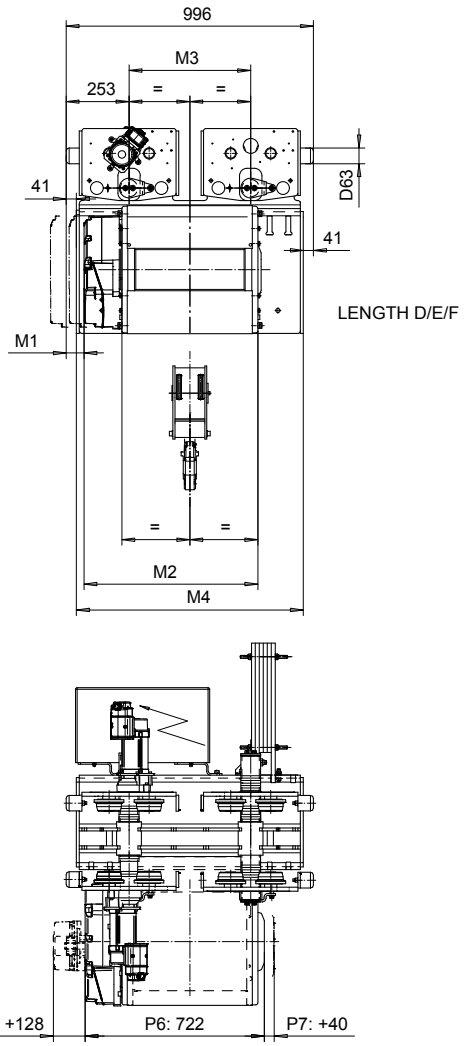

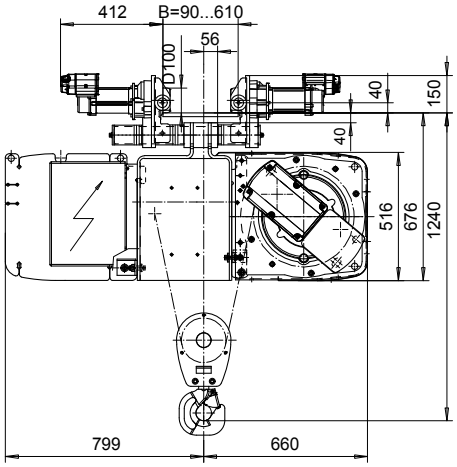

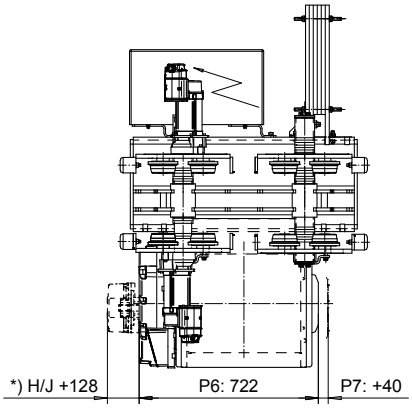

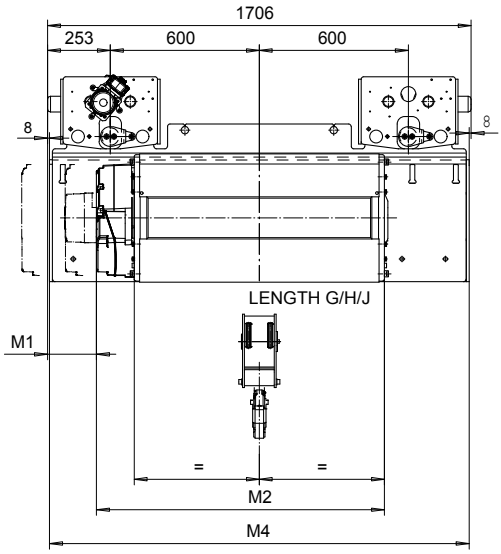

Load	Class	Hoisting speed (m/min)			
(kg)	Fem/ISO	Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
4000	3m/M6	9.5/1.6	12/2	19/3.2	24/4
5000	2m/M5	9.5/1.6	12/2	19/3.2	24/4
+ weight (kg):		-	-	60	80

HOL	Length	M1	M2	M3	M4	Weight
(m)	code	(mm)	(mm)	(mm)	(mm)	(kg)
8.5	D	72	697	490	914	870
13	E	12	817	490	914	900
18	F	- 63	967	490	914	930
25	G	197	1157	1200	1690	1100
33.5	H	72	1407	1200	1690	1200
46	J	-103	1757	1200	1690	1230

Note:
Weight calculated, when B=300mm

Note:
*) Gear brake as standard brake for drum lengths H and J

ETTVPH Design	ETTVPH Chd	Appd	Ref Drawing	QC-N-22
2004-04-27 Date	TROLLEY; NORMAL HEADROOM			1 : 13
SLEQDOCV Owner Dept	2x2 ROPE FALLS			Folder
R&M MATERIALS HANDLING, INC.	D003134-A			Issue 3

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.