


NORMAL HEADROOM, 8 PART DOUBLE
Hoist type:
SX6 082...N0

SI-60Hz

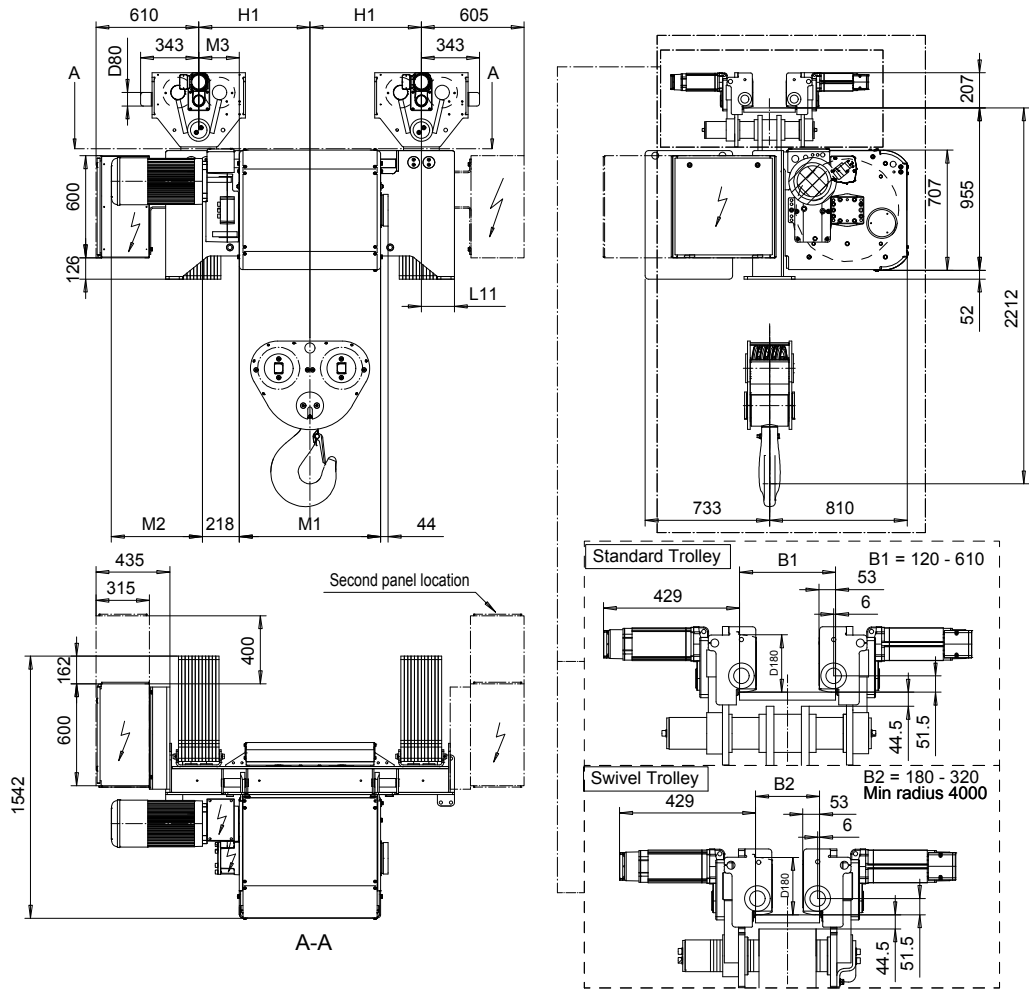

HOL (m)	Length code	M1 (mm)	M3 (mm)	H1 (mm)	L11 (mm)	Wgt - Std Trly (kg)	Wgt -Swivel Trly (kg)
5.5	F	832	239	655	195	2700	2900
7	G	1022	144	655	195	2800	3000
9.5	H	1272	319	955	195	3000	3300
13	J	1622	144	955	195	3300	3600
15.5	K	1922	-306	655	520	3500	3900
19	L	2272	-481	655	520	3800	4200
21.5	M	2522	-306	955	495	4100	4500
24.5	N	2822	-456	955	495	4400	4800

Note: Weight when B = 300mm

Load (kg)	Class	Hoisting motor				
		Hoisting speed (m/min): Gear code				
	Fem/ISO	2.4/0.4: E	3/0.5: F	3.8/0.6: G	4.8: H	5: J
32000	2m/M5	P6,T6	P6,T6	P7,T7	T8	T9
40000	1Am/M4	P6,T6	P7,T7	P8,T8	T9	TA

Motor	P6,T6,T7,T8,T9	P7,TA	P8
M2 (mm)	536	576	711

Hoist Panel Dimensions WxD (mm) + Configuration for Monorail Hoists				
Trolley control type	2-spd or CMXC	CM Select 002	CM Select 003-004	CM Select 005-007
Panel size + 2nd panel size - 380-500V	1000 x 600	1000 x 600	1000 x 600	1000 x 600 + 1000 x 600
Panel size + 2nd panel size - Other Voltages	1000 x 600	1000 x 600	1000 x 600 + 600 x 400	1000 x 600 + 1000 x 600

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

CSDTLI Design 2003-04-16 Date	KHHMKH Chd Appd	Ref Drawing	QD-N-28
SLEODOCV Owner Dept	TROLLEY; NORMAL HEADROOM 2X8 ROPE FALLS		1 of 19 P01.doc
R&M MATERIALS HANDLING INC.	R&M MATERIALS HANDLING, INC HOIST & CRANE PRODUCTS SPRINGFIELD, OHIO	D006898-A	Issue 11/2010