NORMAL HEADROOM, 2 PART DOUBLE

Hoist type:

SX6 022...N0

US-60Hz

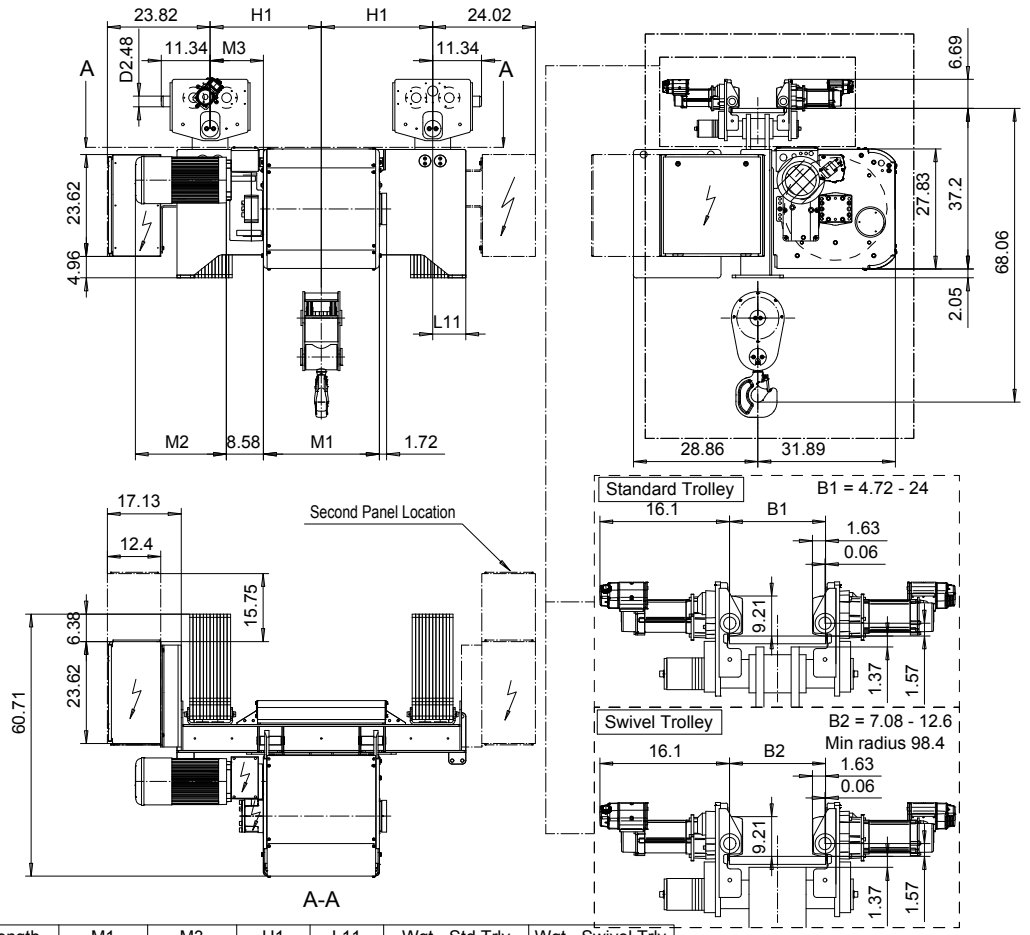

HOL	Length	M1	M3	H1	L11	Wgt - Std Trly	Wgt - Swivel Trly
(ft)	code	(inch)	(inch)	(inch)	(inch)	(lb)	(lb)
54'-2"	E	26.85	12.36	25.79	7.68	4409	4850
72'-2"	F	32.75	9.41	25.79	7.68	4630	5071
96'-9"	G	40.23	5.67	25.79	7.68	5071	5511
127'-11"	H	50.07	12.56	37.6	7.68	5511	6173
170'-7"	J	63.85	5.67	37.6	7.68	6173	6834
208'-4"	K	75.66	-12.05	25.79	20.47	6613	7275
252'-7"	L	89.44	-18.94	25.79	20.47	7275	7937
283'-10"	M	99.29	-12.05	37.6	19.49	7937	8818
321'-6"	N	111.10	-17.95	37.6	19.49	8378	9480

Note: Weight when B = 12"

Load	Class	Hoisting motor				
(TON)	ASME	Hoisting speed (ft/min): Gear code				
		30/4.9: E	40/6.7: F	50/7.8: G	60: H	80: J
6	H4+	P6,T6	P6,T6	P7,T7	T8	T9
7 1/2	H4	P6,T6	P6,T6	P7,T7	T8	T9
10	H3	P6,T6	P7,T7	P8,T8	T9	TA

Motor	P6,T6,T7,T8,T9	P7,TA	P8
M2 (inch)	21.10	22.67	27.99

Hoist Panel Dimensions WxD (inch) + Configuration for Monorail Hoists				
Trolley control type	2-spd or CMXC	CM Select 002	CM Select 003-004	CM Select 005-007
Panel size + 2nd panel size - 380-500V	39.37 x 23.62	39.37 x 23.62	39.37 x 23.62	39.37 x 23.62 + 39.37 x 23.62
Panel size + 2nd panel size - Other Voltages	39.37 x 23.62	39.37 x 23.62	39.37 x 23.62 + 23.62 x 15.75	39.37 x 23.62 + 39.37 x 23.62

CSDTLI Design	KHHMKH Chd	Appd	Ref Drawing	QD-N-22
2010-11-30 Date	TROLLEY; NORMAL HEADROOM			1 : 19
SLEQDOCV Owner Dept	2X2 ROPE FALLS			Folder
	D006895-A			Issue 02/2011

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

R&M MATERIALS HANDLING INC. — R&M MATERIALS HANDLING, INC. HOIST & CRANE PRODUCTS SPRINGFIELD, OHIO