


13 Drum and Rope Sheave

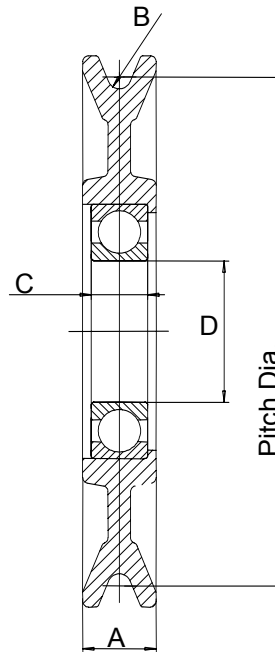

13.1 Bottom Block Sheave Dimensions

Frame Size	Reeving	Rope diameter		Sheave Pitch Dia.		A		B (radius)		C		D	
		mm	in	mm	in	mm	in	mm	in	mm	in	mm	
SX4	Single	8	7.09	180	1.02	25.9	0.17	4.2	0.79	20.1	1.97	50	
SX5	Single	11	9.76	248	1.26	32	0.23	5.8	0.91	23.1	2.56	65	
SX5	Double	8	7.09	180	1.02	25.9	0.17	4.2	0.79	20.1	1.97	50	
SX6	Single	15	13.31	338	1.57	39.9	0.31	8	1.10	27.9	3.35	85	
SX6	Double	11	9.76	248	1.26	32	0.23	5.8	0.91	23.1	2.56	65	

13.2 Drum and Frame Sheave Dimensions

Frame Size	Reeving	Rope diameter		Drum pitch dia.		Rope drum pitch		Sheave pitch dia.		Number of rope clamps on drum
		mm	in	mm	in	mm	in	mm	in	
SX4	Single	8	13.98	355	0.36	9.1	7.09	180	3	
SX5	Single	11	15.98	406	0.49	12.4	9.76	248	4	
SX5	Double	8	15.98	406	0.36	9.1	7.09	180	3 on each end	
SX6	Single	15	23.94	608	0.67	17	13.31	338	6	
SX6	Double	11	23.94	608	0.49	12.4	9.76	248	4 on each end	