


# DOUBLE GIRDER, HIGH CONNECTION, 4 PART SINGLE

Hoist type:

SX2 041..DH

SX3 041..DH

SI-60Hz

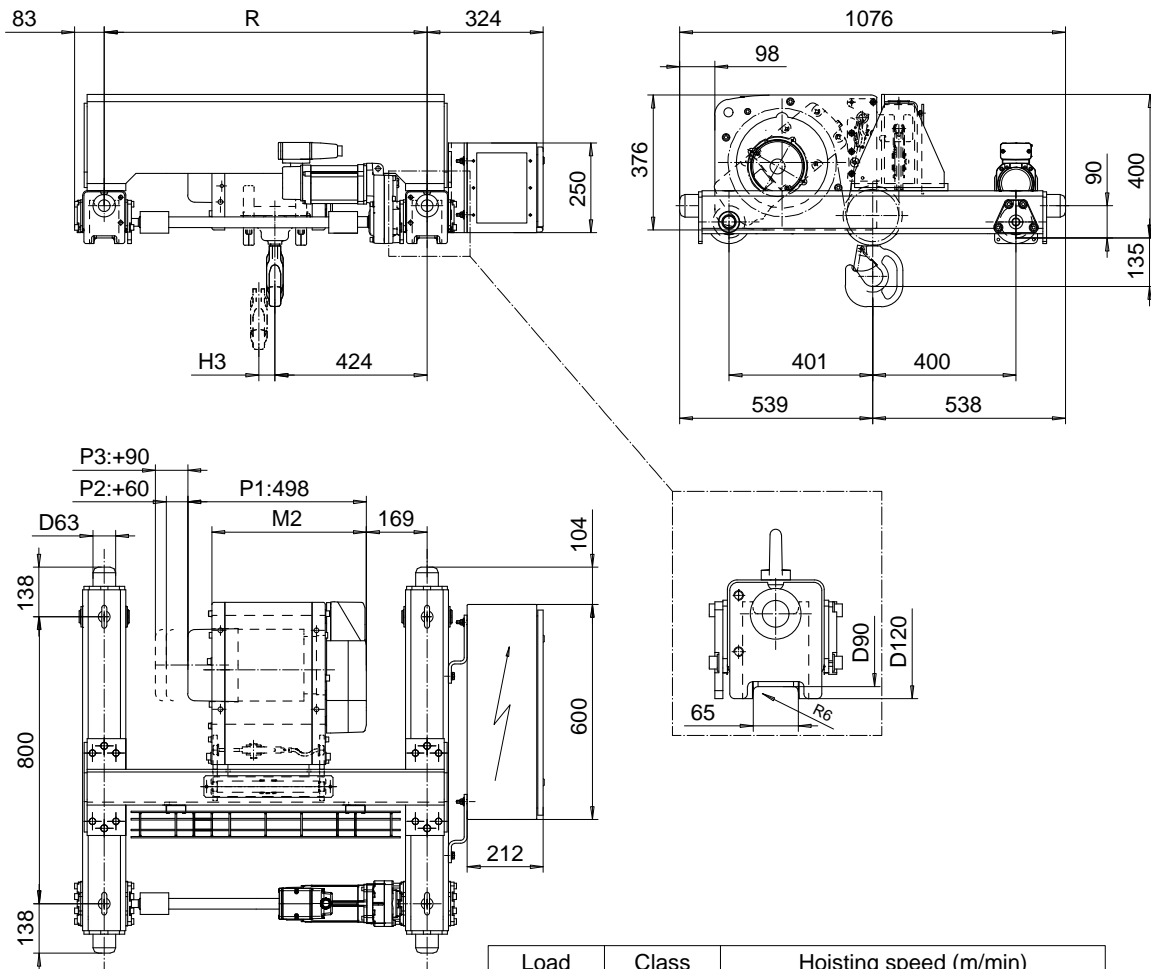

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		F+P1	F+P2	G+P2	H+P3
1600	3m/M6	6/1	6/1	7.5/1.3	9.5/1.6
2000	2m/M5	6/1	6/1	7.5/1.3	9.5/1.6
2500	3m/M6	-	6/1	7.5/1.3	9.5/1.6
3200	2m/M5	-	6/1	7.5/1.3	9.5/1.6
+ weight (kg):		-	10	10	13

HOL (m)	Length code	M2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
6	A	431	45	900	210
9.5	C	561	72	900	220

Note: minR is minimum rail gauge when second brake is supplied  
Standard rail gauges are 900, 1200, 1400, 1700, and 2000 mm

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chk	Appd	Ref Drawing	QA-H-04
Date	TROLLEY; DOUBLE GIRDER			1 of 5
DESIGNED BY	HIGH, 4 ROPE FALLS			1 of 5
DRAWN BY	D002079-A			5